




4001

4002

Accessories




2553-2

25556-D07

J5559-01

Y5562-03

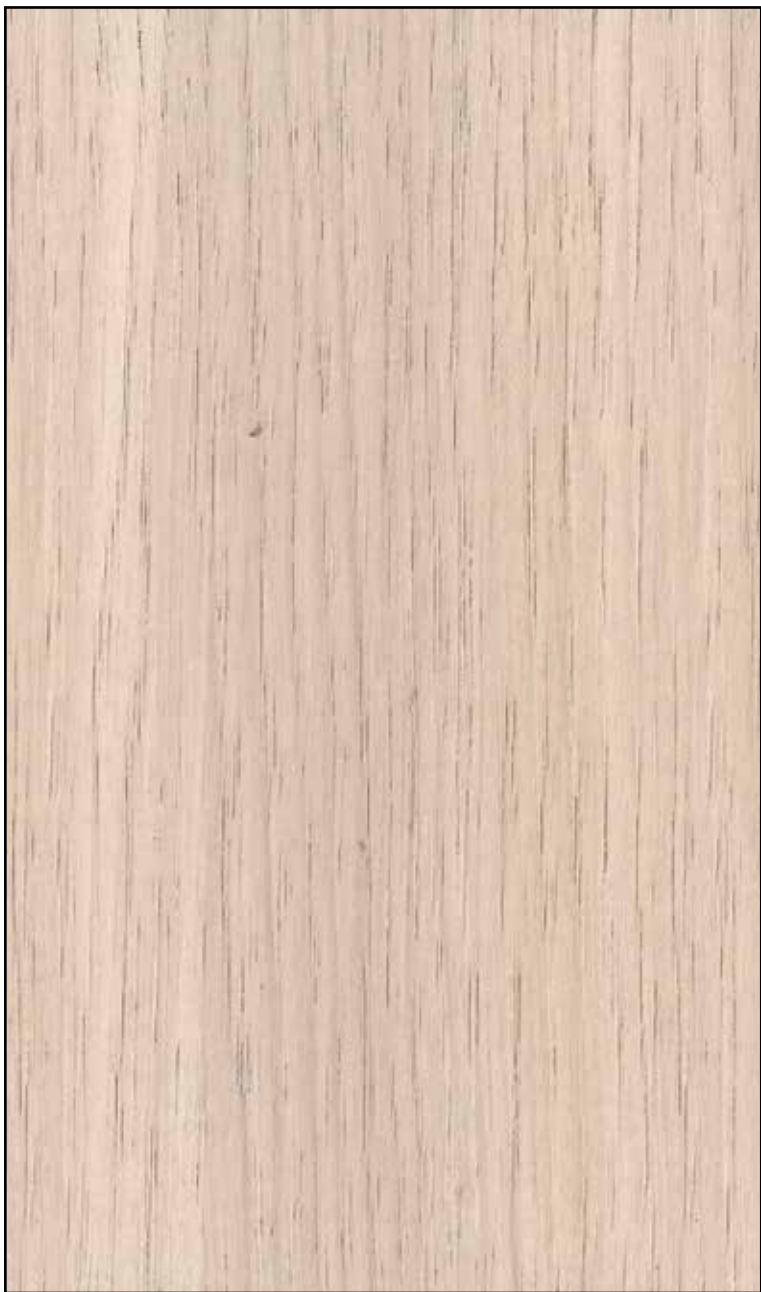

4003

4004



HEALTH AND ENVIRONMENTAL PROTECTION



FIRE AND FLAME RETARDANT



SCRATCH - RESISTANT AND EASY CLEAN



CONVENIENT AND QUICK INSTALLATION




SOUND INSULATION



WATER RESISTANCE

Dimensions **290 cm x 122 cm x 0.5cm**


Made in China

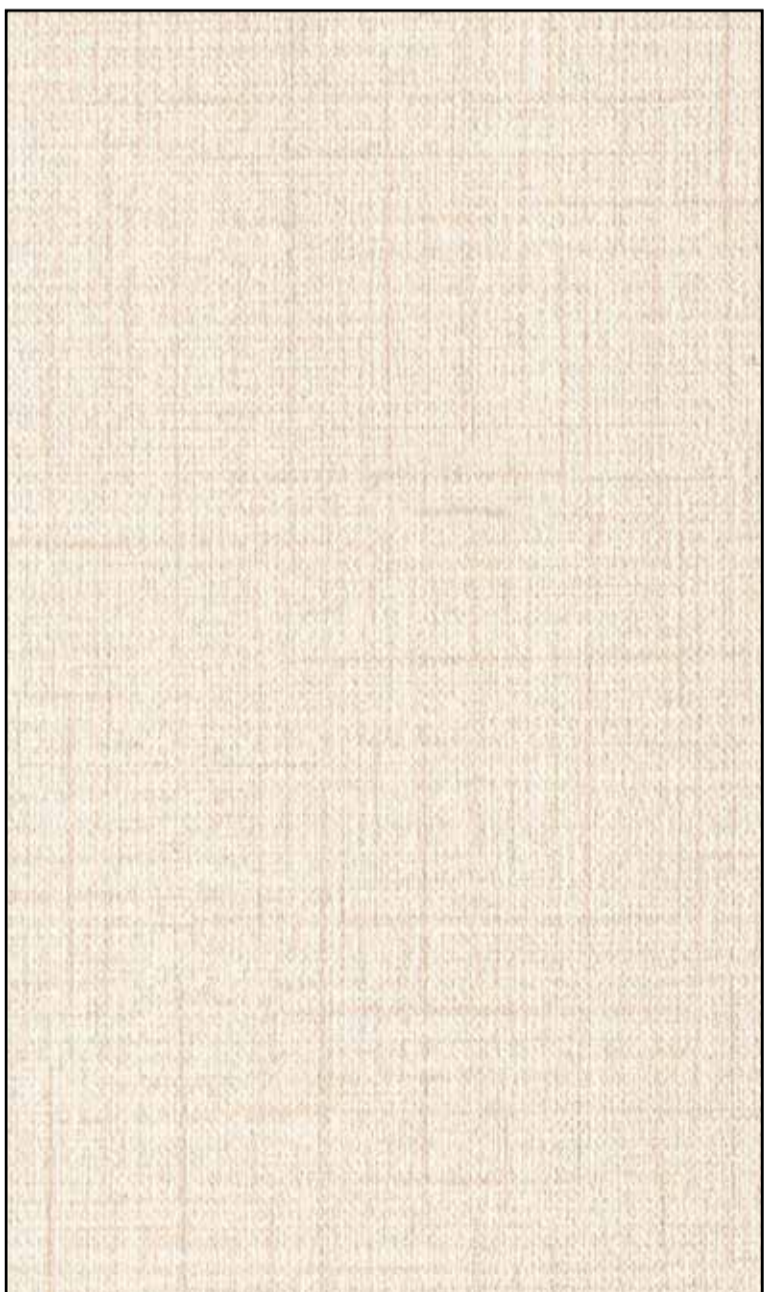


4007



4005

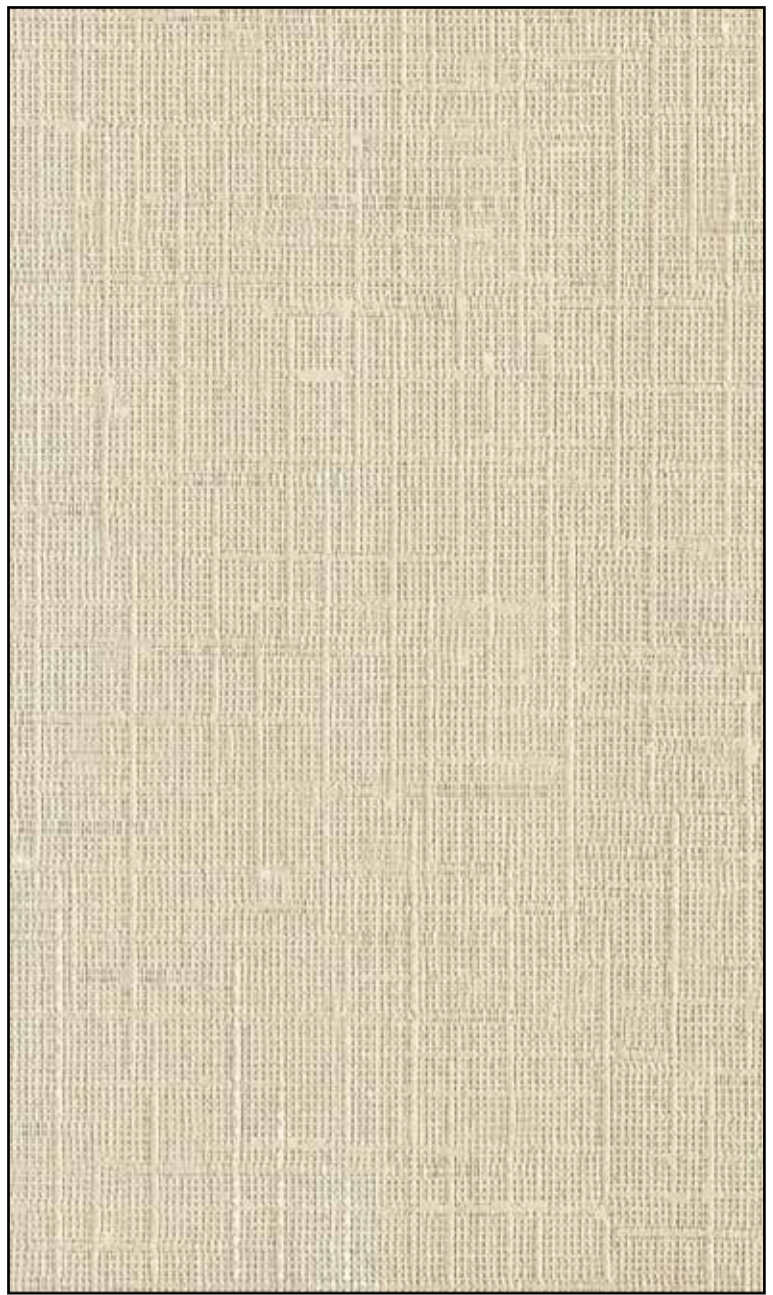

4006

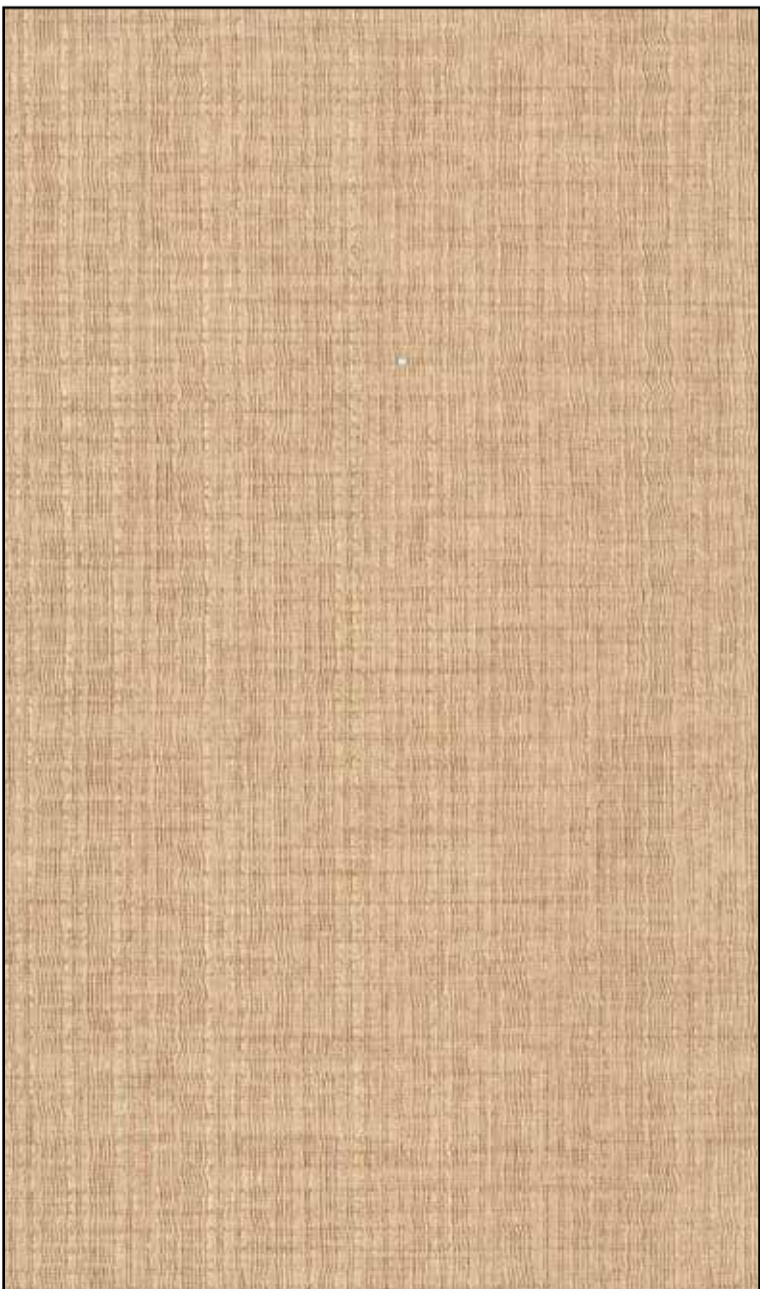

4008



4009

Touches Wood Paper



CONVENIENT AND QUICK INSTALLATION



HEALTH AND ENVIRONMENTAL PROTECTION



SOUND INSULATION



FIRE AND FLAME RETARDANT



WATER RESISTANCE



SCRATCH - RESISTANT AND EASY CLEAN


High Quality of PVC or Pet Film

Environmental PUR Melt

Double Diamond Layer

High Density

Carbon Crystal Board

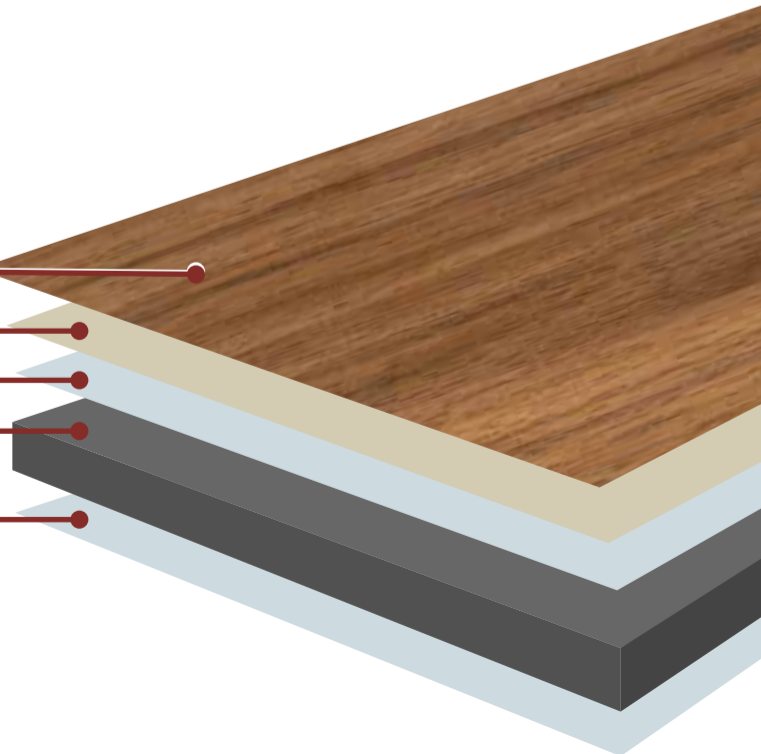

Factory Inspection report of **PVC WALL PANEL**

Product code	5mm PVC Wall Panel	Factory code	5mm PVC Wall Panel	
Size (mm)	5 * 1200 * 2900	Top Layer	0.30 mm	
Base Layer	PCV+(CaCO3)			
Adhesive	PUR	Locking Type	DUAL MODE LOCK	
Test items		Standard Required		Test Result
Base Layer	Impurities	The material is uniform, and impurities above 0.5 mm are not allowed		Positive
	Color uneven	Not allow		Positive
	Fracture	Not allow		Positive
Film	Fracture	Not allow		Positive
	Coloboma	Not allow		Positive
	Pinhole	Not allow		Positive
	Pucker	Not allow		Positive
	Surface Relief	Within a visual distance of 60cm and a diameter of 1m, there shall be no more than one defect		Positive
Test items		Standard	Standard required	
Dimensional characteristics and deviations	Length range	ISO24341	Length -5mm, 10+mm width +- 5mm	L: 2908 W: 1210
	Thickness range	ISO24346	+- 0.15 mm	8.0 mm
	Stitching accuracy	ISO12342	<= 1 mm	0.3 mm
Physical performance	50 °C/6H Shrinkage	ISO23999	Not allow	
	Scratch resistance	ISO 1518	=>1000g	1200g
	Fit degree	ISO24345	=>45N/50mm	55.64N/50mm
	Fouling resistance	GB18102	Non-pollution non-corrosion	Non-pollution, non-corrosion