

LAAG

LVT Collection



ADO
Floor

GROUP COMPANIES AND BRANDS



Window and
Door Systems

ADOPEN®

ADOKAPI®

WINTECH®

SAKELLI

PLASPEN®

Decorative Materials
and Flooring

ADO Alüminyum

ADO film

ADO
Floor

Accessories and
Building Materials

ACCADO®

DECKADO

PLADECK®

ADOSONDAJ

Others

ADO AIR

KUSBABA
TARIM HAYVANCILIK SAN. VE TIC. A.S.

ADO Floor, founded in 2015, has started its production in **2016** by using the most advanced technologies and production techniques in its field. Ado Floor brings **naturalness of wood** with durability of Vinyl together, with the ease of installation and use. ADO Floor, part of ADO Group which is spread over **550 thousand m² area**, is **the only LVT** manufacturing facility in Turkey with **an indoor factory area of 25 thousand m²**. The production activities of ADO Group meet the demand by the domestic market on one hand; a substantial part of its production is **exported to more than 80 countries** across the world from Australia to America, especially, to Europe, Eastern European, Middle Eastern, Asian and North African countries.





LAAG ◀

LVT Collection

Prefers to stay at home. Doesn't like to be at workplaces



GRIT ◀


LVT Collection

Prefers to stay at work. Doesn't like to be at home.

WHY LAAG?



LVT LAYERS

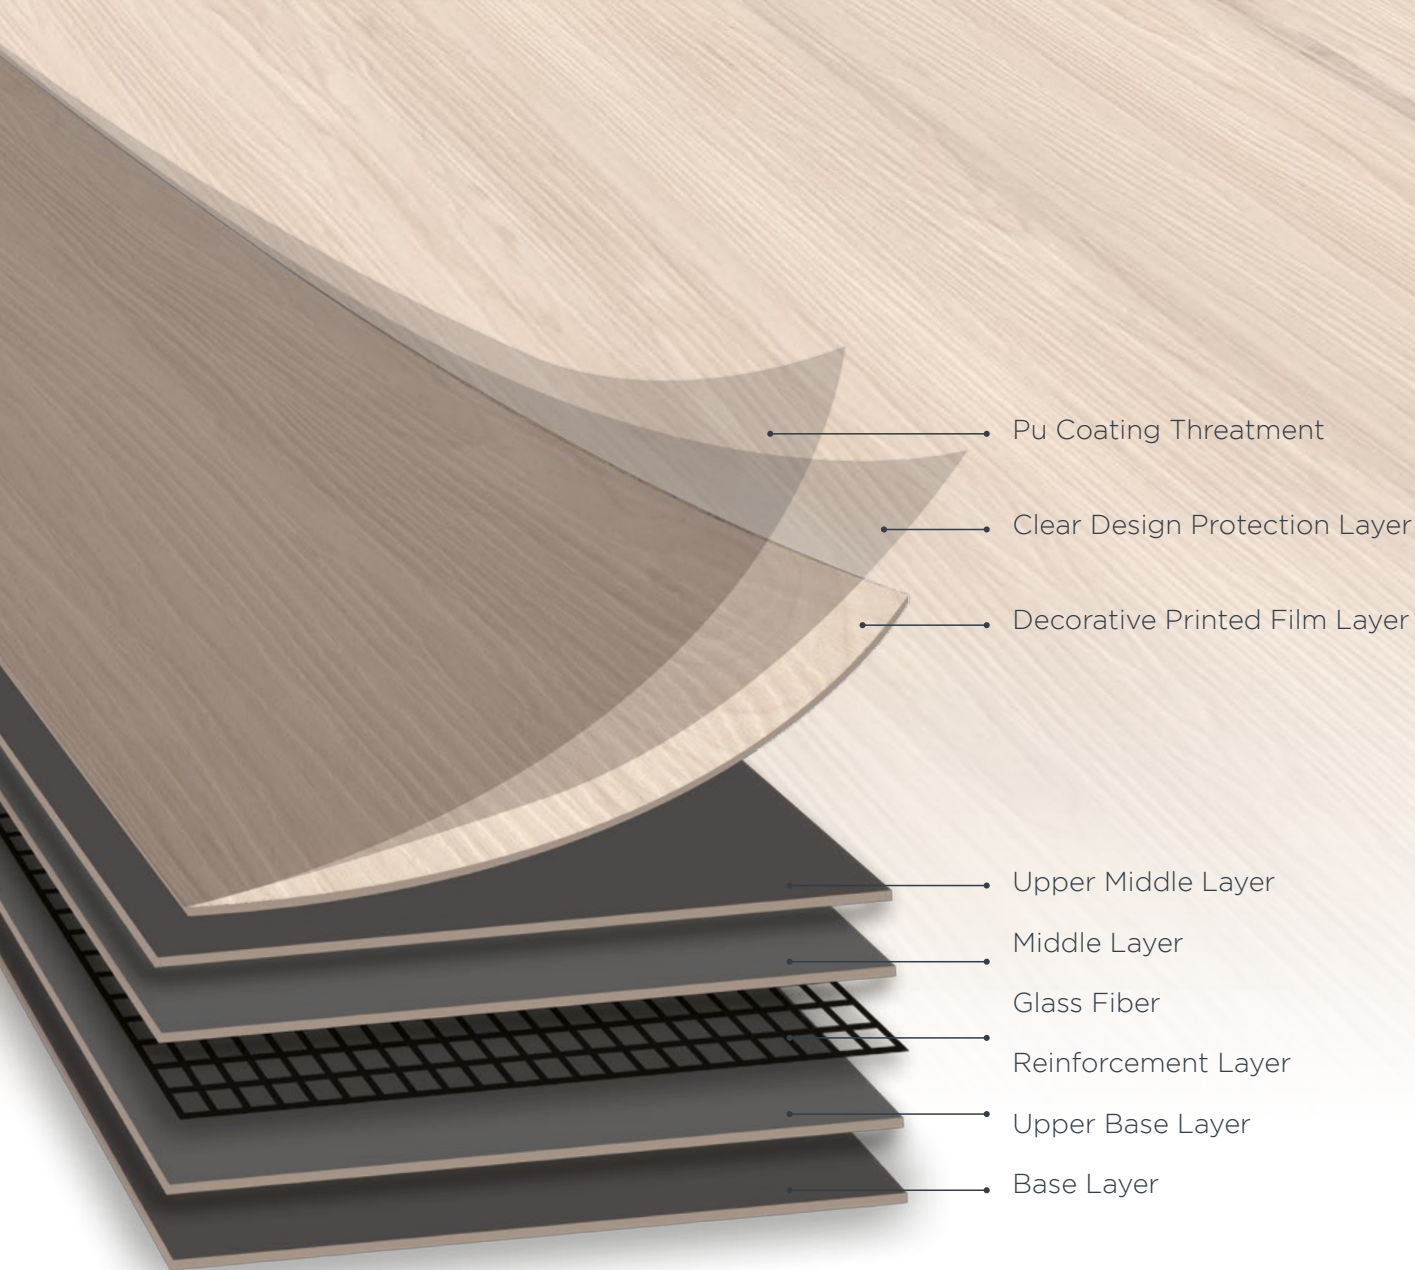

Pu Coating Treatment

Clear Design Protection Layer

Decorative Printed Film Layer

Upper Middle Layer

Middle Layer

Glass Fiber

Reinforcement Layer

Upper Base Layer

Base Layer

Layers of 5 mm. LVT


It consists of 8 layers

LVT is the world's leading choice Vinyl floor covering

LVT (Luxury Vinyl Tiles) is a special (vinyl) flooring product that provides you with options such as the looks of natural wood, natural stone and metal. Available in different dimensions and thicknesses for all type of your project. Unique places can be created with a creative selections of patterns for indoor applications.



Health & Safety




Dust Free Installation



Recyclable




Phthalate Free




2,5 - 5 mm.



Waterproof




Easy Maintenance



Easy Installation



Eco-Friendly



Antibacterial



Warm Underfoot



Sound Insulation

NEW FLOOR ATTRACTION

LAAG is easy to install and uninstall. The installation process is clean, quick and quiet. Decorative, warm and cozy floor combinations can be created by using different models together.



THE WORLD OF LAAG





- Houses
- Summer Houses
- Home Office
- Kindergarten
- Boutique Stores



- Bedrooms
- Nurseries
- Dressing Rooms
- Play Rooms




- Kitchens
- Bathrooms
- Laundry Rooms



- Study Rooms
- Cellars
- Sports Rooms



LVT SYSTEM SOLUTIONS




CLICK SYSTEM

169,0 x 1210,4 mm.
296,2 x 601,2 mm.



LOOSE LAY

177,8 x 1219,2 mm.
610,0 x 610,0 mm.
305,0 x 610,0 mm.



DRY BACK

177,8 x 1219,2 mm.
610,0 x 610,0 mm.
305,0 x 610,0 mm.
457,2 x 457,2 mm.


VIVA SERIES



KAFO L1110



KOMFORTO L1190

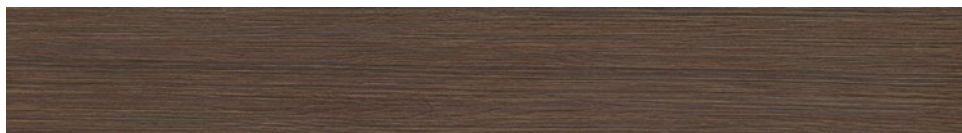

SUBITA L1180



HISTO L1220



SILENTA L1160



STILO L1000



LARGA L1170



SENTEMA L1050

VIVA SERIES



KLASIKA L1010



MODERNA L1020



ESENCA L1210



POEMO L1040



FRESA L1070



SENFINA L1060



LUNO L1130




APERTA L2010

IRONA SERIES



FEROCA L3000

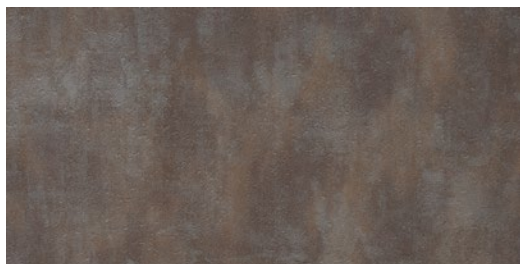


GRACIA L3010



TITANO L3020

STONA SERIES

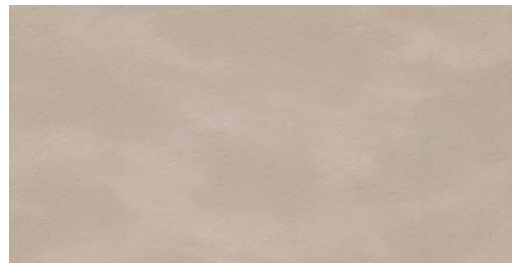

FORTA L4000



MASTRO L4010



RIGORA L4020



**NEW
FLOOR
ATTRACTION**



Easy Installation

You can create your own floor attraction **with easy installation methods**

LAAG is easy to install and uninstall. The installation process is clean, quick and quiet. Decorative, warm and cozy floor combinations can be created by using different models together.



**NEW
FLOOR
ATTRACTION**



Sound Insulation

LVT provides
unmatched
quietness in
application and use

In houses, noise pollution due to the floors is a collective issue.

LAAG is the perfect choice for you and your loved ones during their play time and while spending time on your hobbies.



You are standing on **healthy ground**

LAAG doesn't require polishing and maintenance, it is also anti-bacterial with its special waterproof structure. It does not harbor dust, mites and other microorganisms. With these features, it provides unmatched hygiene in houses. It is not hazardous to human health. This property is certified by institutions.





NEW FLOOR ATTRACTION



2,5 - 5 mm.

Anywhere and
everywhere,
**with all types and
properties required**

Aside from its creative visual options, LAAG can also be manufactured in thicknesses that vary according to the frequency of use for a specific place. Sophisticated stone-walled places, cozy wooden application and creative combinations... All according to your taste.



NEW FLOOR ATTRACTION



Waterproof
























Water and moisture resistant

In indoor areas where there is heavy pedestrian traffic, noise pollution is mainly due to the floors. LAAG is the perfect choice for functional tranquility in schools, libraries, hospitals and laboratories, and for exquisite tranquility in other places.

TECHNICAL SPECIFICATIONS

EN ISO 10582

PRODUCT SPECIFICATION	STANDARD	2,50 mm. Dry-Back	5,00 mm. Click/Loose-Lay
 Total Thickness	EN-ISO 24346	2,50 mm.	5,00 mm.
 Thickness of Wear Layer	EN-ISO 24340	0,30 mm.	0,30 mm.
 Collection		22	22
 Usage Classification	EN-ISO 10582	Class 23 / Class 31	Class 23 / Class 31
 Tile Size	EN-ISO 24342	Dry Back: 305,0 x 610,0 mm. Dry Back: 457,2 x 457,2 mm. Dry Back: 610,0 x 610,0 mm.	Loose Lay: 305,0 x 610,0 mm. Loose Lay: 610,0 x 610,0 mm. Click: 296,2 x 601,2 mm.
 Plank Size	EN-ISO 24342	Dry Back: 177,8 x 1219,2 mm.	Loose Lay: 177,8 x 1219,2 mm. Click: 169,0 x 1210,4 mm.
 Packaging Per Carton: Tiles		Dry Back: 305,0 x 610,0 mm. - 3,163 m ² 17 pcs. Dry Back: 457,2 x 457,2 mm. - 1,672 m ² 8 pcs. Dry Back: 610,0 x 610,0 mm. - 2,976 m ² 8 pcs.	Loose Lay: 305,0 x 610,0 mm. - 1,488 m ² 8 pcs. Loose Lay: 610,0 x 610,0 mm. - 1,488 m ² 4 pcs. Click: 296,2 x 601,2 mm. - 1,424 m ² 8 pcs.
 Packaging Per Carton: Planks		Dry Back: 177,8 x 1219,2 mm. - 3,685 m ² 17 pcs.	Loose Lay: 177,8 x 1219,2 mm. - 1,734 m ² 8 pcs. Click: 169,0 x 1210,4 mm. - 1,636 m ² 8 pcs.
 Total Weight	EN-ISO 23997	4.550 kg/m ²	10.010 kg/m ²
 Abrasion Resistance	EN 660-2	Group T	Group T
 Castor Chair Continuous Use	EN 425 / ISO 4918	No effect	No effect
 Indentation-Residual	ISO 24343-1	≤ 0,10 mm.	≤ 0,10 mm.
 Light Fastness	EN ISO 105-B02	>5	≥6
 Resistance to Chemicals	EN ISO 26987	Very Good	Very Good
 Dimensional Stability	EN-ISO 23999	≤0,25%	≤0,15%
 Thermal Resistance	ISO 8302:1991	0,0126 m ² K/W	0,0155 m ² K/W
 Reaction to Fire	EN 13501-1	BFL-S1	BFL-S1
 Slip Resistance	EN 13893	DS	DS
 Sound Reduction: Impact Sound	EN ISO 10140-1-5:2010 EN ISO 717-2:2013	6dB	11,4 dB
 Formaldehyde	EN 717-1:2014	E1	E1
 Static Electrical Charging	EN 1815	-	≤2kV

